



1600 系列

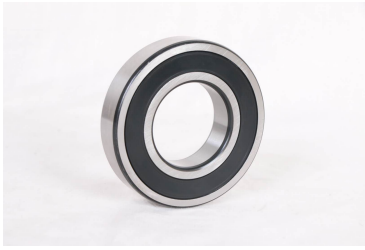

| 轴承型号 | 尺寸 [mm] | | | | 基本额定功率(kN) | | Mass |
|------|---------|--------|--------|--------|------------|---------|--------|
| | d | D | B | rs min | 动态(Cr) | 静态(Cor) | Kg |
| 1602 | 6.35 | 17.462 | 6.35 | 0.3 | 1.97 | 0.73 | 0.0064 |
| 1603 | 7.938 | 22.225 | 7.144 | 0.3 | 3.29 | 1.36 | 0.0095 |
| 1604 | 9.525 | 22.225 | 7.144 | 0.4 | 3.33 | 1.41 | 0.0086 |
| 1605 | 7.938 | 23.019 | 7.938 | 0.3 | 3.33 | 1.41 | 0.0168 |
| 1606 | 9.525 | 23.019 | 7.938 | 0.4 | 3.33 | 1.41 | 0.0218 |
| 1607 | 11.112 | 23.019 | 7.938 | 0.4 | 2.69 | 1.27 | 0.0222 |
| 1614 | 9.525 | 28.575 | 9.525 | 0.6 | 3.92 | 2.25 | 0.035 |
| 1615 | 11.112 | 28.575 | 9.525 | 0.6 | 3.92 | 2.25 | 0.034 |
| 1616 | 12.7 | 28.575 | 9.525 | 0.6 | 3.92 | 2.25 | 0.03 |
| 1620 | 11.112 | 34.925 | 11.112 | 0.6 | 5.9 | 3.5 | 0.05 |
| 1621 | 12.7 | 34.925 | 11.112 | 0.6 | 5.9 | 3.5 | 0.048 |
| 1622 | 14.288 | 34.925 | 11.112 | 0.6 | 5.9 | 3.5 | 0.04 |
| 1623 | 15.875 | 34.925 | 11.112 | 0.6 | 5.9 | 3.5 | 0.048 |
| 1628 | 15.875 | 41.275 | 12.7 | 0.6 | 7.25 | 3.5 | 0.072 |
| 1630 | 19.05 | 41.275 | 12.7 | 0.6 | 7.25 | 4.45 | 0.065 |
| 1633 | 15.875 | 44.45 | 12.7 | 0.6 | 7.25 | 4.45 | 0.092 |
| 1635 | 19.05 | 44.45 | 12.7 | 0.6 | 7.25 | 4.45 | 0.085 |
| 1638 | 19.05 | 50.8 | 14.288 | 0.8 | 10.8 | 4.45 | 0.12 |
| 1640 | 22.225 | 50.8 | 14.288 | 0.8 | 10.8 | 6.95 | 0.112 |
| 1641 | 25.4 | 50.8 | 14.288 | 0.8 | 10.8 | 6.95 | 0.1 |
| 1652 | 28.575 | 63.5 | 15.875 | 0.8 | 12.8 | 6.95 | 0.21 |
| 1654 | 31.75 | 63.5 | 15.875 | 0.8 | 12.8 | 8.4 | 0.19 |

1600 系列

| | | | | | | | |
|------|------|------|------|-----|------|------|-------|
| 1657 | 31.8 | 65.1 | 17.5 | 0.8 | 16.5 | 10.6 | 0.215 |
| 1658 | 33.3 | 65.1 | 17.5 | 0.8 | 16.5 | 10.6 | 0.2 |